


Light frame

DESCRIPTION

Luminous frame features an innovative design,
with high efficiency,
It is mounted on false ceiling plates
Made of aluminum and opal diffuser

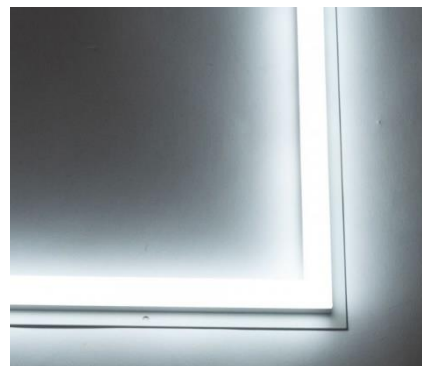

SUMMARY TABLE

Reference	Power (W)	Max. luminaire flux (lm)	CCT color temperature (K)
BX3-LPF-6060-40W-CW	40 W	3600	6000
BX3-LPF-6060-40W-W	40 W	3600	4000
BX3-LPF-6060-48W-CW	48 W	4320	6000
BX3-LPF-6060-48W-W	48 W	4320	4000

CHARACTERISTICS

Material	Aluminum
Diffuser	Opal
Finish	White
Protection index	IP 20
Retinal risk	GR0
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class II
CCT	6000K / 4000K
CRI	>80
Luminous efficacy	Up to 100 lm/W
Shelf life	L70B50 40,000h
Regulation	No
Driver	External
Facility	Recessed
Operating Temperature	-10°C to 25°C
Degrees of opening	120°

DIMENSIONS

Power (W)	Long (mm)	Broad (mm)	High (mm)	Weight (Kg)
40	595	595	12	0.5
48	595	595	12	0.5



PHOTOMETRY

