

LED downlight

DESCRIPTION

Downlight, round design, with a degree 38° opening for better uniformity.
Made of aluminum, with faceted reflector, adjustable spotlight



SUMMARY TABLE


Reference	Power (W)	Max. luminaire flux (lm)	CCT color temperature (K)
BX3-40W-G-CW	40 W	4000	6000
BX3-40W-GW	40 W	4000	4000
BX3-40W-G-WW	40 W	3760	3000

CHARACTERISTICS

Material	Aluminum
Reflector	Faceted
Finish	White
Protection index	IP20
Retinal risk	GR0
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class II
CCT	6000/ 4000/3000
CRI	>80
Luminous efficacy	Up to 100 lm/W
Shelf life	L70B50 50,000h
Regulation	No
Driver	Abroad
Facility	Recessed
Operating Temperature	-10°C to 25°C
Degrees of opening	38°

DIMENSIONS

Power (W)	Diameter (mm)	Emp. diameter (mm)	High (mm)	Weight (Kg)
40 W	188	170	160	0.8

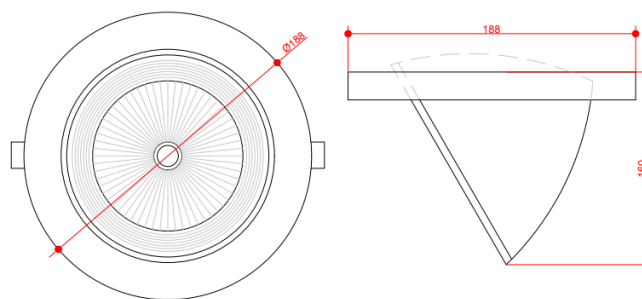

PHOTOMETRY

