

Track light projector

DESCRIPTION

Cylindrical projector designed to provide accent lighting. System Optic composed of faceted aluminum reflector and anti-glare ring for better visual comfort, with three-phase connector



SUMMARY TABLE


Reference	Power (W)	Color T° (k)	Max flow (lm)
BX3-FC-3F-30W-W-WW	30 W	3000	2527
BX3-FC-3F-30W-WW	30 W	4000	2700
BX3-FC-3F-30W-W-CW	30 W	6000	2700

CHARACTERISTICS

Material	Aluminum casting
Reflector	Faceted aluminum
Finish	White
Protection index	IP 20
Impact protection	IK 04
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class I
CCT	6000/4000 /3000K
CRI	>85
Luminous efficacy	Up to 90 lm/W
Shelf life	L80B10 50,000h
Regulation	No
Facility	Three-phase rail
Driver	Internal
Operating Temperature	-10°C to 25°C
Opening angle	15th

DIMENSIONS

Power (W)	Diameter (mm)	High (mm)	Weight (Kg)
30	90	220	0.3

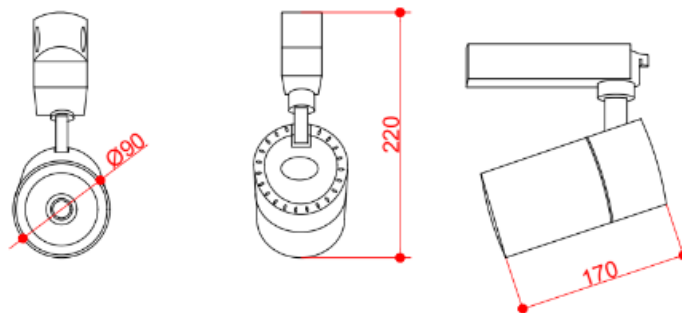

PHOTOMETRY

