

## LED downlight

### DESCRIPTION

Downlight, ultra-thin, round design, with a degree 120° opening for better uniformity.  
Made of aluminum and opal diffuser, with black ring



### SUMMARY TABLE


Reference	Power (W)	Max. luminaire flux (lm)	CCT color temperature (K)
BX3-GP-LZ-3-B-CW	18 W	1380	6000
BX3-GP-LZ-3-BW	18 W	1380	4000
BX3-GP-LZ-3-B-WW	18 W	1291	3000

### CHARACTERISTICS

Material	Aluminum
Diffuser	Opal
Finish	Black, Black
Protection index	IP 40
Retinal risk	GR0
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class II
CCT	6000/ 4000/ 3000
CRI	>80
Luminous efficacy	Up to 80 lm/W
Shelf life	L70B50 40,000h
Regulation	No
Driver	Abroad
Facility	Recessed
Operating Temperature	-10°C to 25°C
Degrees of opening	120°

### DIMENSIONS

Power (W)	Diameter (mm)	Emp. diameter (mm)	High (mm)	Weight (Kg)
18W	225	200	17	0.36

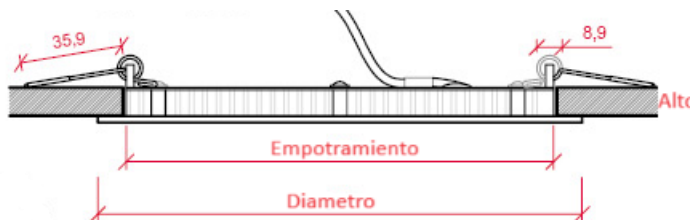

### PHOTOMETRY

