

Track light projector

DESCRIPTION

Cylindrical projector designed to provide accent lighting. System Optic composed of faceted aluminum reflector and anti-glare ring for better visual comfort, with three-phase connector



SUMMARY TABLE


Reference	Power (W)	Color T° (k)	Max flow (lm)
BX3-TR30W-xxxx-W	30 W	4000	2700
BX3-TR30W-xxxx-WW	30 W	3000	2538
BX3-TR40W-xxxx-W	40 W	4000	3600
BX3-TR40W-xxxx-WW	40 W	3000	3384

CHARACTERISTICS

Material	Aluminum casting
Reflector	Faceted aluminum
Finish	White / Black
Protection index	IP 20
Protection index	IK 04
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class I
CCT	4000k/3000k
CRI	>85
Luminous efficacy	Up to 90 lm/W
Shelf life	L80B10 50,000h
Regulation	No
Facility	Three-phase rail
Driver	Internal
Operating Temperature	-10°C to 25°C
Opening degrees	38th

DIMENSIONS

Power (W)	Diameter (mm)	High (mm)	Weight (Kg)
30 / 40	99.5	210	0.5

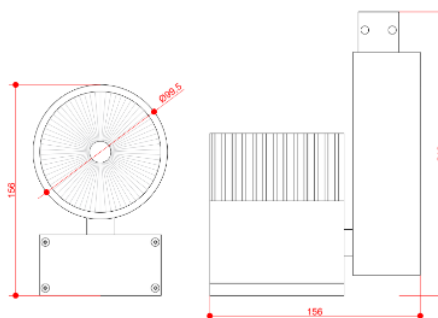

PHOTOMETRY

