


LED strips

DESCRIPTION

Constant voltage LED strip 24Vdc, 8mm wide, 5m roll
Ideal for different environments, indirect, accent, decorative lighting
Lighting of aluminium mouldings and profiles

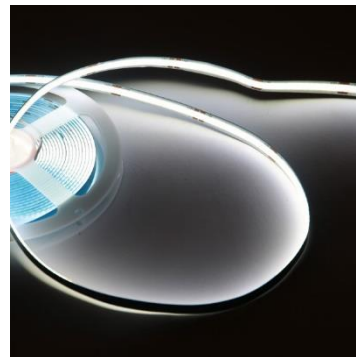

SUMMARY TABLE

Reference	Power (W/m)	Flow (lm/m)	Color T° (K)
BX3-COB-320-24DC-CW	10 W	1000	6000
BX3-COB-320-24DC-W	10 W	1000	4000
BX3-COB-320-24DC-WW	10W	940	3000

CHARACTERISTICS


Voltage	24 Vdc
Power	10 W/m
Total power	50 W
Protection index	IP 20
Wide strip	8 mm
Roll meters	5 m
EPREL Classification	F
CCT	6000/4000/3000K
At-risk group	GR0
CRI	>80 and >90
Luminous efficacy	Up to 100 lm/W

CHARACTERISTICS

Isolation	0.5 Kv
Opening Angle	120°
Type of Led	SMD 3030
Shelf life	40000h
Regulation	Yeah
Tc	75°C
Operating Temperature	-10°C to 25°C
Degrees of opening	120°

DIMENSIONS

Ref.	Long (m)	Broad (mm)	High (mm)	Weig ht (Kg)
COB-320	5	8mm	-----	0.9



PHOTOMETRY

