

LED strips

DESCRIPTION

Designed for prolonged use of artificial light
Ideal for work environments.
Made of cast aluminum, for better heat dissipation



SUMMARY TABLE

Reference	Power (W)	Max. luminaire flux (lm)	Color T° (K)
BX3-T5DG18W-CW	18 W	1530	6000
BX3-T5DG18W-W	18 W	1530	4000

CHARACTERISTICS


Material	Aluminum
Diffuser	Opal
Finish	White
Protection index	IP 20
Impact protection	IK 06
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class I
CRI	>70
Luminous efficacy	Up to 85 lm/W

CHARACTERISTICS

CCT	6000 / 4000 K
Opening Angle	120°
Type of Led	SMD 3030
Shelf life	L80B10 25°C 50,000h
Regulation	No
Driver	Internal
Operating Temperature	-10°C to 25°C
Degrees of opening	120°

DIMENSIONS

Ref.	Long (mm)	Broad (mm)	High (mm)	Weight (Kg)
RGB	1200	22	35	1.0

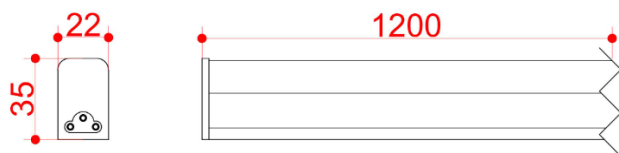

PHOTOMETRY

