

LED Downlight Pack

DESCRIPTION

Pack of 4 Downlight, surface mounted, round, with a degree 120° opening for better uniformity.
Made of aluminum and opal diffuser



SUMMARY TABLE


Reference	Power (W)	Max. luminaire flux (lm)	CCT color temperature (K)
BX3-2011P4-CW	20 W	1800	6000
BX3-2029P4-W	20 W	1800	4000

CHARACTERISTICS

Material	Aluminum
Diffuser	Opal
Finish	White
Led	Epistal
Protection index	IP40
Retinal risk	GR0
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class II
CCT	6000/ 4000 K
CRI	>80
Luminous efficacy	Up to 90 lm/W
Shelf life	L70B50 40,000h
Regulation	No
Driver	Abroad
Facility	Surface
Operating Temperature	-10°C to 25°C
Degrees of opening	120°

DIMENSIONS

Power (W)	Diameter (mm)	Diameter of fence (mm)	High (mm)	Weight (Kg)
20 W	210	26	28	1.5

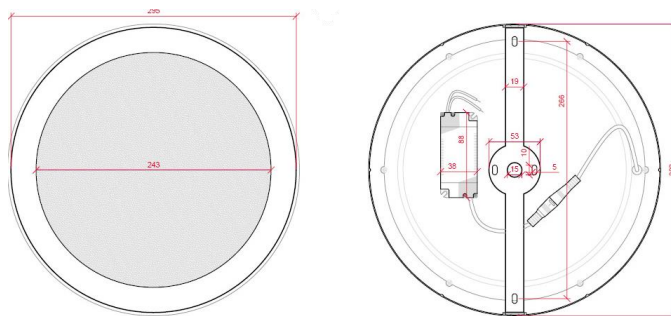

PHOTOMETRY

