

LED projectors

DESCRIPTION

Professional projector for outdoor lighting.
It has a compact and slim design with great luminous efficiency.
Made of cast aluminum, for better heat dissipation

SUMMARY TABLE

Reference	Power (W)	Max. luminaire flux (lm)	Color T° (K)
BX3-HVFL50W-F-CW	50 W	7500	6000
BX3-HVFL50W-FW	50 W	7500	4000
BX3-HVFL100W-F-CW	100 W	15000	6000
BX3-HVFL100W-FW	100 W	15000	4000
BX3-HVFL150W-F-CW	150 W	22500	6000
BX3-HVFL150W-FW	150 W	22500	4000
BX3-HVFL200W-F-CW	200 W	30000	6000
BX3-HVFL200W-FW	200 W	30000	4000



CHARACTERISTICS


Material	Aluminum casting
Diffuser	Tempered glass
Finish	Black RAL9005
Protection index	IP 65
Impact protection	IK 08
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class I
CRI	>70
Luminous efficacy	Up to 150 lm/W
Degrees of opening	120°

DIMENSIONS

Ref.	Long (mm)	Broad (mm)	High (mm)	Weight (Kg)
50 W	240	64	281	1.3
100 W	284	85	334	2.3
150 W	310	85	345	3.5
200 W	310	85	345	3.9

CHARACTERISTICS

Fixation	Lyre, steerable
Tilt Angle	Variable 0-180°
Type of Led	Lumiled 2835
Shelf life	L90B10 25°C 80,000h
Regulation	Yes (By triac)
Driver	Internal
Operating Temperature	-10°C to 25°C

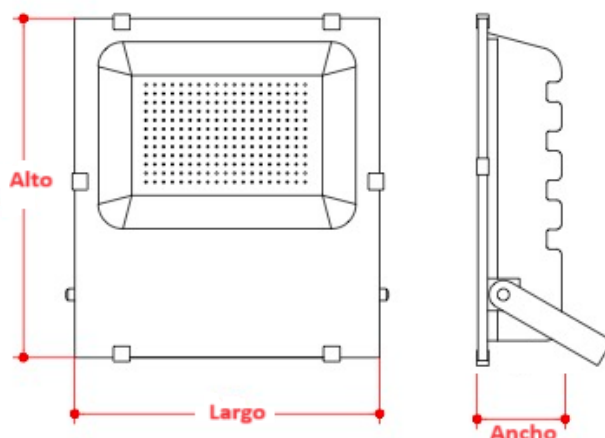


RECOMMENDED APPLICATIONS

Tennis / Paddle Courts

Industrial Areas

Parking

Facades



PHOTOMETRY

