

LED projectors

DESCRIPTION

Professional projector for outdoor lighting.
It has a compact and slim design with great luminous efficiency.
Made of cast aluminum, for better heat dissipation

SUMMARY TABLE

Reference	Power (W)	Max. luminaire flux (lm)	Color T° (K)
BX3-HVFL100W-CPCW	100 W	16000	6000
BX3-HVFL100W-CPW	100 W	16000	4000
BX3-HVFL150W-CPCW	150 W	24000	6000
BX3-HVFL150W-CPW	150 W	24000	4000
BX3-HVFL200W-CPCW	200 W	32000	6000
BX3-HVFL200W-CPW	200 W	32000	4000



CHARACTERISTICS


Material	Aluminum casting
Diffuser	Tempered glass
Finish	Black RAL9005
Protection index	IP 65
Impact protection	IK 08
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class I
CRI	>70
Luminous efficacy	Up to 160 lm/W
Degrees of opening	120°

DIMENSIONS

Ref.	Long (mm)	Broad (mm)	High (mm)	Weight (Kg)
100 W	295	60	345	23
150 W	330	60	365	3.5
200 W	360	60	400	3.9

CHARACTERISTICS

Fixation	Lyre, steerable
Tilt Angle	Variable 0-180°
Type of Led	Lumiled 2835
Shelf life	L90B10 25°C 80,000h
Regulation	Yes (By triac)
Driver	Internal
Operating Temperature	-10°C to 25°C

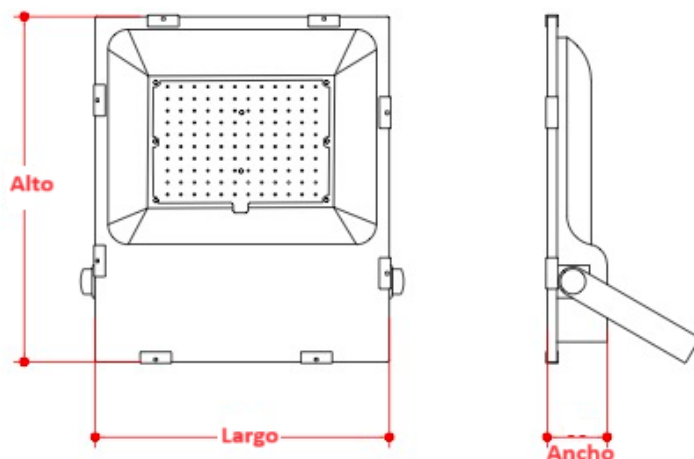


RECOMMENDED APPLICATIONS

Tennis / Paddle Courts

Industrial Zones

Parking lots

Facades



PHOTOMETRY

