

HIGH BAY ADJUSTABLE LED bell

IP65

IK
08

DESCRIPTION

Luminaire for high heights, with high efficiency
Made of high quality aluminum, with different beam openings
For better light distribution.



SUMMARY TABLE


Reference	Power (W)	Max. luminaire flux (lm)	Installation height (m.)
BX3-HVUFO100W-H-CW	100 W	18000	5-6
BX3-HVUFO150W-H-CW	150 W	27000	6-7
BX3-HVUFO200W-H-CW	200 W	36000	8-9

CHARACTERISTICS

Material	Aluminum casting
Diffuser	Polycarbonate
Finish	Black
protection index	IP 65
Impact protection	IK 08
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class I
CCT	6000K
CRI	>70
Luminous efficacy	Up to 180 lm/W
Shelf life	L70B10 70,000h
regulation	0-10V
Facility	Suspended
Driver	Internal
Operating Temperature	-10°C to 25°C
Opening angle	120°

DIMENSIONS

Power (W)	Diameter (mm)	High (mm)	Weight (Kg)
100	300	66.5	1.5
150	360	71.5	1.75
200	415	71.5	2.65

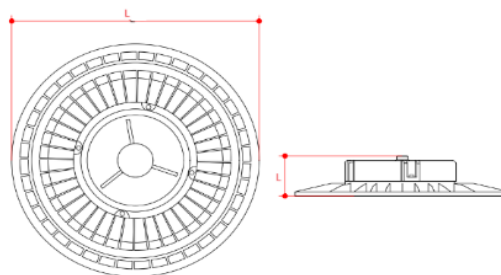

PHOTOMETRY

