



LED watertight

DESCRIPTION

IP65 waterproof luminaire, which incorporates two 1200mm LED tubes, includes polycarbonate diffuser and Thermoplastic body with excellent properties, resistance to impact and UV resistant

SUMMARY TABLE


Reference	Power (W)	Max. luminaire flux (lm)	CCT color temperature (K)
BX3-CX-YH4236T	40 W Max.	-----	2700-6500 K

CHARACTERISTICS


Material	Thermoplastic
Diffuser	Transparent
Finish	Grey
Protection index	IP65
Retinal risk	GR0
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class I
CCT	2700-6500 K
CRI	>80
Luminous efficacy	Up to 100 lm/W
Shelf life	L70B50 50,000h
Regulation	No
Driver	Internal
Facility	Surface/suspend
Operating Temperature	-10°C to 25°C
Degrees of opening	120°

DIMENSIONS

Power (W)	Long (mm)	Broad (mm)	High (mm)	Weight (Kg)
20 W	1200	113	98	0.45

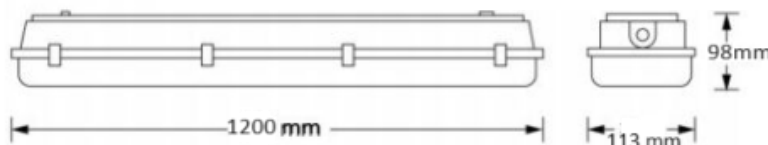

PHOTOMETRY



ACCESSORIES



Ceiling fixing



Cable suspension



Cable gland



Suspension chain