

## LED Downlight Pack

### DESCRIPTION

Pack of two Downlights, with an ultra-thin, round design, with a degree 120° opening for better uniformity.  
Made of aluminum and opal diffuser



### SUMMARY TABLE


Reference	Power (W)	Max. luminaire flux (lm)	CCT color temperature (K)
BX3-1011P5-W	20 W	1800	4000

### CHARACTERISTICS

Material	Aluminum
Diffuser	Opal
Protection index	IP 40
Retinal risk	GR0
Led	Epistar
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class II
CCT	4000 K
CRI	>80
Luminous efficacy	Up to 90 lm/W
Shelf life	L70B50 40,000h
Regulation	No
Driver	Abroad
Facility	Recessed
Operating Temperature	-10°C to 25°C
Degrees of opening	120°

### DIMENSIONS

Power (W)	Diameter (mm)	Emp. diameter (mm)	High (mm)	Weight (Kg)
20 W	225	200	17	0.35

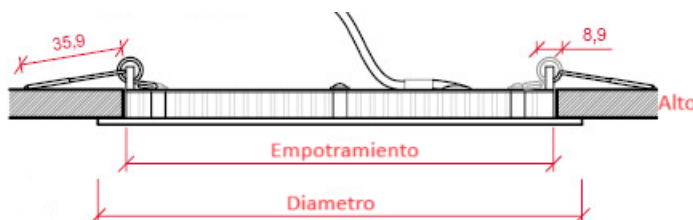

### PHOTOMETRY

