

LED projectors

DESCRIPTION

Professional projector for outdoor lighting.
It has a compact and slim design with great luminous efficiency.
Made of cast aluminum, for better heat dissipation



SUMMARY TABLE

Reference	Power (W)	Max. luminaire flux (lm)	Color T° (K)
BX3-6016-CW	200 W	240000	6000

CHARACTERISTICS


Material	Aluminum casting
Diffuser	Tempered glass
Finish	Black RAL9005
Protection index	IP 66
Impact protection	IK 08
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class I
CRI	>70
Luminous efficacy	Up to 120 lm/W

CHARACTERISTICS

Fixation	Lyre, steerable
Tilt Angle	Variable 0-180°
Type of Led	SMD 5730
Shelf life	L80B10 25°C 50,000h
Regulation	Yes (By triac)
Driver	Internal
Operating Temperature	-10°C to 25°C
Degrees of opening	120°

DIMENSIONS

Ref.	Long (mm)	Broad (mm)	High (mm)	Weight (Kg)
150 W	378	38	278	2.1

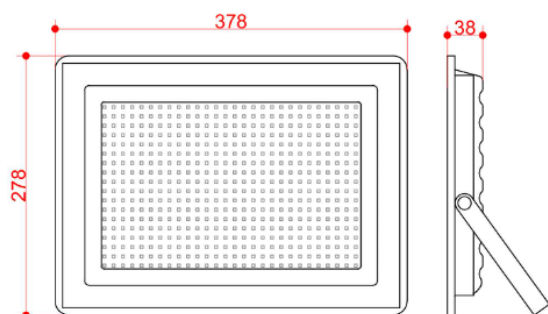

PHOTOMETRY

