

Wall washer



DESCRIPTION

Wall washer designed to provide outdoor lighting
To bathe any surface. With an IP 65, water resistant
Composite lens optics for high light beam transmission

SUMMARY TABLE


Reference	Power (W)	Color T° (k)	Max flow (lm)
BX3-623025-W	18 W	4000	1377
BX3-623025-WW	18 W	3000	1290

CHARACTERISTICS

Material	Foundryaluminum
Diffuser	Tempered glass
Finish	Grey
Protection index	IP 65
Protection index	IK 08
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class I
CCT	4000 /3000 K
CRI	>80
Luminous efficacy	Up to 76 lm/W
Shelf life	L80B10 50,000h
Regulation	No
Facility	Surface
Driver	Internal
Operating Temperature	-10°C to 25°C
Energy classification	G
Degree of opening	60°

DIMENSIONS

Power (W)	Long (mm)	Broad (mm)	High (mm)	Weight (Kg)
18	996	49.3	94	0.7

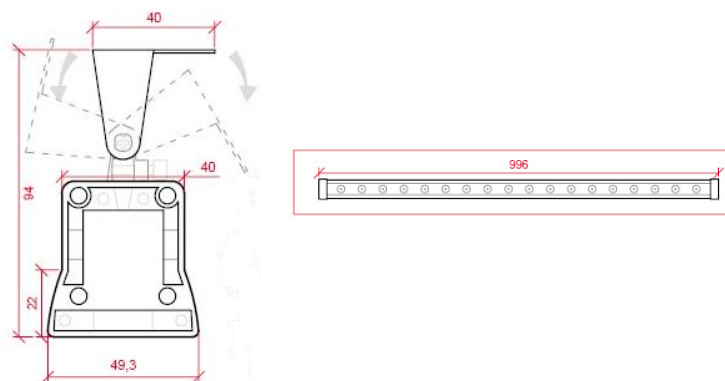

PHOTOMETRY

