

LED watertight

DESCRIPTION

IP65 waterproof luminaire,
It incorporates a polycarbonate diffuser and
Thermoplastic body with excellent properties, resistance to
impact and UV resistant



SUMMARY TABLE


Reference	Power (W)	Max. luminaire flux (lm)	CCT color temperature (K)
BX3-WP-40W-1200-CW	40 W	3600	6000 K
BX3-WP-75W-1500-CW	75 W	7650	6000 K

CHARACTERISTICS


Material	Thermoplastic
Diffuser	Opal
Finish	White
Protection index	IP65
Protection against impacts	IK08
Retinal risk	GR0
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class II
CCT	2700-6500 K
CRI	>80
Luminous efficacy	Up to 102 lm/W
Shelf life	L70B50 50,000h
Regulation	No
Driver	Internal
Facility	Surface/suspend
Operating Temperature	-10°C to 25°C
Degrees of opening	120°

DIMENSIONS

Power (W)	Long (mm)	Broad (mm)	High (mm)	Weight (Kg)
20 W	1200	56	62	0.8
75 W	1500	56	62	1.2

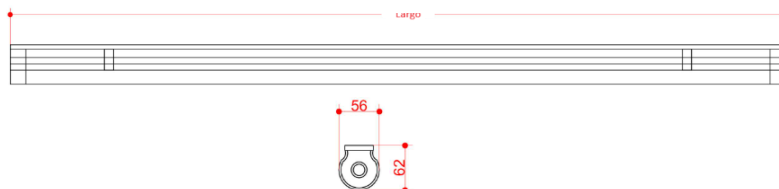

PHOTOMETRY

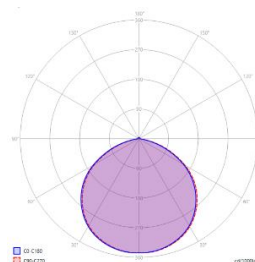

ACCESSORIES



Ceiling fixing