

Wall washer

DESCRIPTION

Wall washer designed to provide outdoor lighting
To bathe any surface. With an IP 65, water resistant
Composite lens optics for high light beam transmission



SUMMARY TABLE


Reference	Power (W)	Color T° (k)	Max flow (lm)
BX3-WW-108W-AC220V-CW	108 W	6000	8748
BX3-WW-108W-AC220V-WW	108 W	3000	8490

CHARACTERISTICS

Material	Foundryaluminum
Diffuser	Tempered glass
Finish	Grey
Protection index	IP 65
Protection index	IK 08
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class I
CCT	4000 /3000 K
CRI	>80
Luminous efficacy	Up to 76 lm/W
Shelf life	L80B10 40,000h
Regulation	No
Facility	Surface
Driver	Internal
Operating Temperature	-10°C to 25°C
Energy classification	G
Degrees of opening	60°

DIMENSIONS

Power (W)	Long (mm)	Broad (mm)	High (mm)	Weight (Kg)
108	1000	80	90	2.0

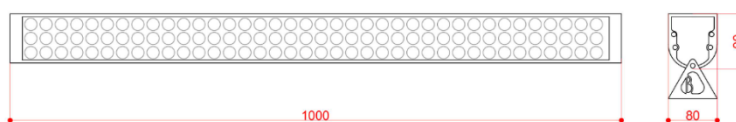

PHOTOMETRY

