

Environmental Lighting

DESCRIPTION

Ambient luminaires with a modern design, for urban areas,
This luminaire is made of cast aluminum with two lyres.
The optical group is composed of a separate PCB with glass protection



SUMMARY TABLE

Reference	Power (W)	Max. luminaire flux (lm)	Color T° (K)
BX3-SL58A-40W-CW	40 W	5600	6000
BX3-SL58A-40W-W	40 W	5600	4000

CHARACTERISTICS


Material	Aluminum casting
Diffuser	PMMA standard
Finish	Black RAL9005
Protection index	IP 66
Impact protection	IK 08
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class I
CRI	>70
Luminous efficacy	Up to 140 lm/W
Beam	Extensive

CHARACTERISTICS

Fixation	Vertical to the staff
Fixing diameter	Ø 60 mm
Tilt Angle	No
Remote management	YES (Optional)
Surge protection	4 KV
Type of Led	Lumiled 3030
Shelf life	L70B10 50,000h
Regulation	YES (Optional)
Facility	On a staff
Driver	Internal
Operating Temperature	-10°C to 25°C

DIMENSIONS

Ref.	Long (mm)	Broad (mm)	High (mm)	Weight (Kg)
40 W	485	485	696	8.9

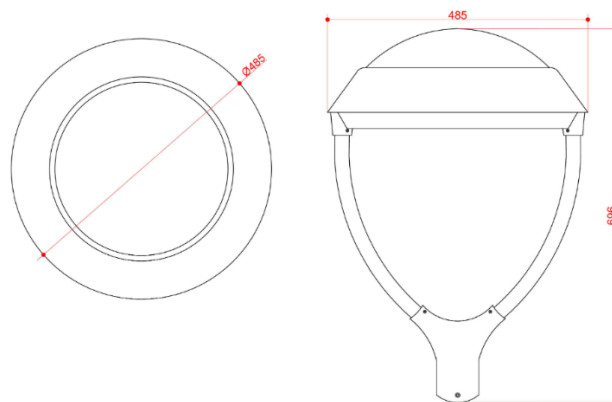

APPLICATIONS

Residential lighting

Squares

Parks

Urban lighting



PHOTOMETRY

