


## LED strips

### DESCRIPTION

Constant voltage LED strip 230Vdc, 100m roll  
Ideal for different environments, indirect, accent, decorative lighting  
Lighting of aluminium mouldings and profiles

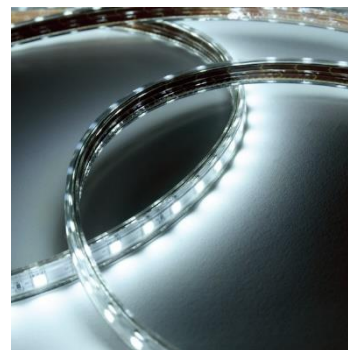

### SUMMARY TABLE

Reference	Power (W/m)	Flow (lm/m)	Color T° (K)
BX3-220352860-100MCW	4.8 W	240	6000
BX3-220352860-100MWW	4.8 W	240	4000

### CHARACTERISTICS


Voltage	230V
Power	4.8 W/m
Total power	480 W
Protection index	IP 65
Wide strip	13 mm
Roll meters	100 m
EPREL Classification	G
CCT	6000/4000/3000K
At-risk group	GR0
CRI	>80
Luminous efficacy	Up to 50 lm/W

### CHARACTERISTICS

Isolation	0.5 Kv
Opening Angle	120°
Type of Led	SMD 3528
Shelf life	40000h
Regulation	Yeah
Tc	75°C
Operating Temperature	-10°C to 25°C
Degrees of opening	120°

### DIMENSIONS

Ref.	Long (m)	Broad (mm)	High (mm)	Weight (Kg)
220352860	100	13mm	-----	1.5



### PHOTOMETRY

