

Driver

DESCRIPTION

Constant current driver
DALI regulation
Powers from 6 – 48 W
Class II

SUMMARY TABLE

Reference	Model	Power (W)
BX3-DALI-6W	CM-6VADDR	6 W
BX3-DALI-12W	CM-18VADDR	12 W
BX3-DALI-18W	CM-18VADDR	18 W
BX3-DALI-25W	CM-24VADDR	25 W
BX3-DALI-36W	CM-40VADDR	36 W
BX3-DALI-40W	CM-40VADDR	40 W
BX3-DALI-48W	CM-48VADDR	48 W

CHARACTERISTICS

Voltage	100-270 V
Frequency	50 / 60 Hz
Power	6-48 W
F. P	0.95
Tc	75-80°C
Operating Temperature	-15-48Vdc
Regulation	DALI
Protection index	IP20
Insulation Class	Class II
Shelf life	30000 h


DIMENSIONS

Ref.	Long (mm)	Broad (mm)	High (mm)	Weight (Kg)
6W	100	43	43	0.09
12W	100	43	43	0.09
18W	100	43	43	0.09
25W	100	43	43	0.09
36W	140	47	29	0.165
40W	140	47	29	0.165
48W	140	47	29	0.165



CHARACTERISTICS

	Vout	Iout
BX3-DALI-6W	12-48 Vdc	300 mA
BX3-DALI-12W	12-48 Vdc	300 mA
BX3-DALI-18W	12-48 Vdc	300 mA
BX3-DALI-25W	50-76 Vdc	300 mA
BX3-DALI-36W	50-76 Vdc	600 mA
BX3-DALI-40W	50-76 Vdc	600 mA
BX3-DALI-48W	50-76 Vdc	600 mA

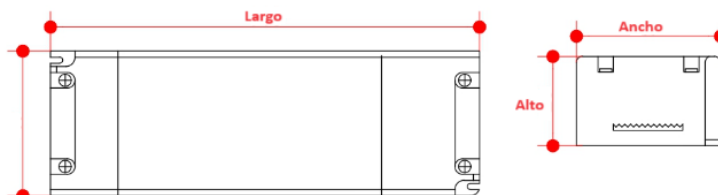

Scheme

