

LED downlight

DESCRIPTION

Downlight, ultra-thin, round design, with a degree 120° opening for better uniformity.
Made of aluminum and opal diffuser



SUMMARY TABLE


Reference	Power (W)	Max. luminaire flux (lm)	CCT color temperature (K)
BX3-RDP15-20W-CW	20 W	1600	6000
BX3-RDP15-20W-W	20 W	1600	4000
BX3-RDP15-20W-WW	20 W	1498	3000
BX3-RDP16-25W-CW	25 W	2000	6000
BX3-RDP16-25W-W	25 W	2000	4000
BX3-RDP16-25W-WW	25 W	1872	3000

CHARACTERISTICS

Material	Aluminum
Diffuser	Opal
Finish	White
Protection index	IP 40
Retinal risk	GR0
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class II
CCT	6000/ 4000/ 3000
CRI	>80
Luminous efficacy	Up to 80 lm/W
Shelf life	L70B50 40,000h
Regulation	No
Driver	Abroad
Facility	Recessed
Operating Temperature	-10°C to 25°C
Degrees of opening	120°

DIMENSIONS

Power (W)	Diameter (mm)	Emp. diameter (mm)	High (mm)	Weight (Kg)
20 W	240	217	17	0.42
25 W	295	275	17	0.49

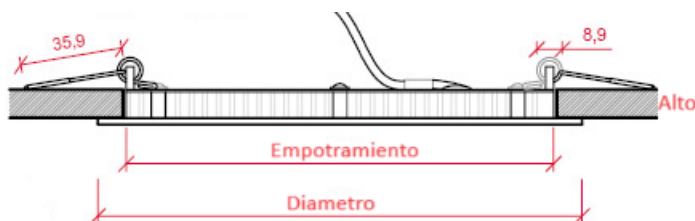

PHOTOMETRY

