

## LED downlight



### DESCRIPTION

Downlight, ultra-thin, square design, with a degree 120° opening for better uniformity.  
Made of aluminum and opal diffuser

### SUMMARY TABLE


Reference	Power (W)	Max. luminaire flux (lm)	CCT color temperature (K)
BX3-RDP-25W-CW	25 W	2180	6000
BX3-RDP-25W-W	25 W	2180	4000
BX3-RDP-25W-WW	25 W	2040	3000

### CHARACTERISTICS

Material	Aluminum
Diffuser	Opal
Finish	White
Retinal risk	GR0
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class II
CCT	6000/ 4000/ 3000
CRI	>80
Luminous efficacy	Up to 87 lm/W
Shelf life	L70B50 40,000h
Regulation	No
Driver	Abroad
Facility	Recessed
Operating Temperature	-10°C to 25°C
Degrees of opening	120°

### DIMENSIONS

Power (W)	Length/Width (mm)	Embedding (mm)	High (mm)	Weight (Kg)
9 W	300x300	277x277	19	0.7

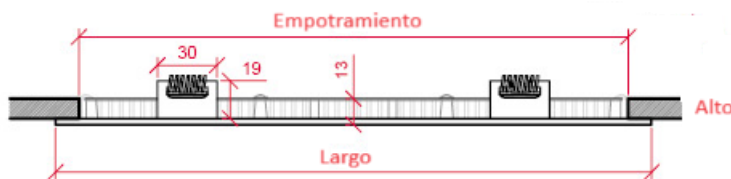

### PHOTOMETRY

