

LED watertight

DESCRIPTION

IP65 waterproof luminaire,
It incorporates a polycarbonate diffuser and
Thermoplastic body with excellent properties, resistance to
impact and UV resistant



SUMMARY TABLE


Reference	Power (W)	Max. luminaire flux (lm)	CCT color temperature (K)
BX3-FSB-18-CW	18 W	2399	5000 K
BX3-FSB-36-CW	36 W	4740	5000 K
BX3-FSB-45-CW	45 W	6049	5000 K

CHARACTERISTICS

Material	Thermoplastic
Diffuser	Opal
Finish	White
Protection index	IP65
Protection against impacts	IK07
Retinal risk	GR0
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class II
CCT	5000 K
CRI	>80
Luminous efficacy	Up to 134 lm/W
Shelf life	L70B50 50,000h
Regulation	No
Driver	Internal
Facility	Surface
Operating Temperature	-10°C to 25°C
Degrees of opening	120°

DIMENSIONS

Power (W)	Long (mm)	Broad (mm)	High (mm)	Weight (Kg)
18 W	605	34.5	29	0.8
36 W	1165	60	41	0.8
45 W	1465	60	41	1.2

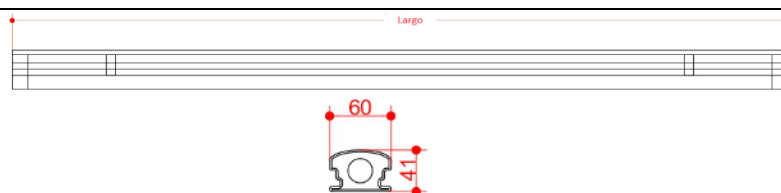

PHOTOMETRY

