

LED downlight

DESCRIPTION

Downlight, surface mounted, round, with presence detector, with a 120° opening for better uniformity.
Made of aluminum and opal diffuser



SUMMARY TABLE


Reference	Power (W)	Max. luminaire flux (lm)	CCT color temperature (K)
BX3-PL-18-D-CW	18 W	1500	6000
BX3-PL-18-DW	18 W	1500	4000
BX3-PL-18-D-WW	18 W	1404	3000

CHARACTERISTICS

Material	Aluminum
Diffuser	Opal
Finish	White
Protection index	IP20
Retinal risk	GR0
Voltage	220-240 V
Frequency	50/60 Hz
Power factor	>0.95
Insulation class	Class II
CCT	6000/ 4000/3000
CRI	>80
Luminous efficacy	Up to 83 lm/W
Shelf life	L70B50 40,000h
Regulation	No
Driver	Abroad
Facility	Surface
Operating Temperature	-10°C to 25°C
Degrees of opening	160°

DIMENSIONS

Power (W)	Diameter (mm)	Diameter of fence (mm)	High (mm)	Weight (Kg)
12 W	300	-----	120	0.29

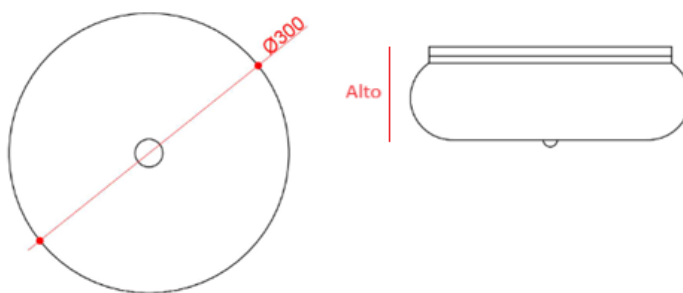

PHOTOMETRY

