

5、

	d
FLOODLIGHT 10 W	62 mm
FLOODLIGHT 20W	62 mm
FLOODLIGHT 30W	95 mm
FLOODLIGHT 50W	105mm
FLOODLIGHT 100 W	145 mm
FLOODLIGHT 150 W	200 mm
FLOODLIGHT 200 W	235 mm
FLOODLIGHT 300 W	235 mm

Note: Installation height shall be less than 5m

6a、

10W	ST5
20W	ST5
30W	ST5
50W	ST5
100W	ST5

Large flat head ST5x40 Phillips pan head screws, quantity: 2 pcs

8x40 white nylon plastic expansion anchors, quantity: 2 pcs

304 stainless steel washer, 15x1, central hole 5.2 Quantity: 2 pcs




6b、

150W	M8
200W	M8
300W	M8

Hexagon head screw ST8x50 / 304 stainless steel Quantity: 2 pcs

Expansion anchor bolt 12x55, Quantity: 2 pcs

304 stainless steel washer 18x8.2x1.5, Quantity: 2 pcs

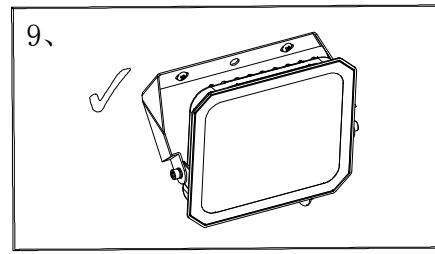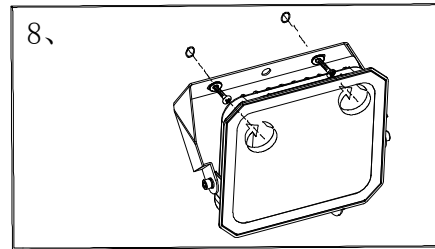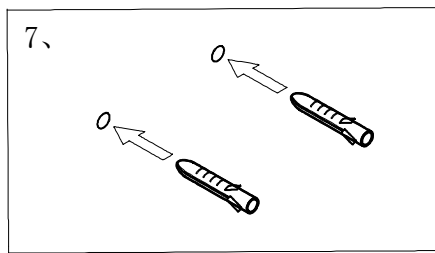

10.

ATENCIÓN: Todos los productos de uso exterior deben utilizar una caja de conexiones con protección mínima IP65 en la conexión eléctrica para prevenir la infiltración de humedad por el cable, que puede dañar la luminaria.

ATENÇÃO: Todos os produtos de uso exterior não devem utilizar uma caixa de passagem com índice de proteção mínimo IP65 na conexão elétrica para evitar infiltração de umidade através do cabo, que pode danificar a luminária.

≥IP65

≥IP65

≥IP65

≥IP65

N L ⊕

≥IP65